



Emergency Contact Numbers:

Police, Fire, Ambulance	000
SES	132 500
D.O.T - WA	13 11 56
EPA WA	(08) 6364 7000

Safe Work Method Statement

WMS No:		Task/Activity	Bobcat Operation
SPH Job No:		Date to be Reviewed :	
Project:		Personnel responsible for monitoring this activity:	
Site Address:		Monitoring and review:	
Principal Contractor :		Little Diggers Rockingham Client:	
Sub-Contractor:		Operator Name:	
References			
WHS Act 2020	WA OHS Regulations 2020	State Environmental Protection Policies WA	
Manual Handling Code of Practice	Code of Practice Safety Precautions in Trenching Operations	Traffic Management For Works On Roads Code of Practice	
Environmental Protection Act 1986	Wildlife Conservation Act 1950	Biodiversity Conservation Act 2016	
	Environmental Code of Practice For Road & Construction Maintenance		
Personnel Consulted with on this WMS			
Position:	Name	Signature	Date

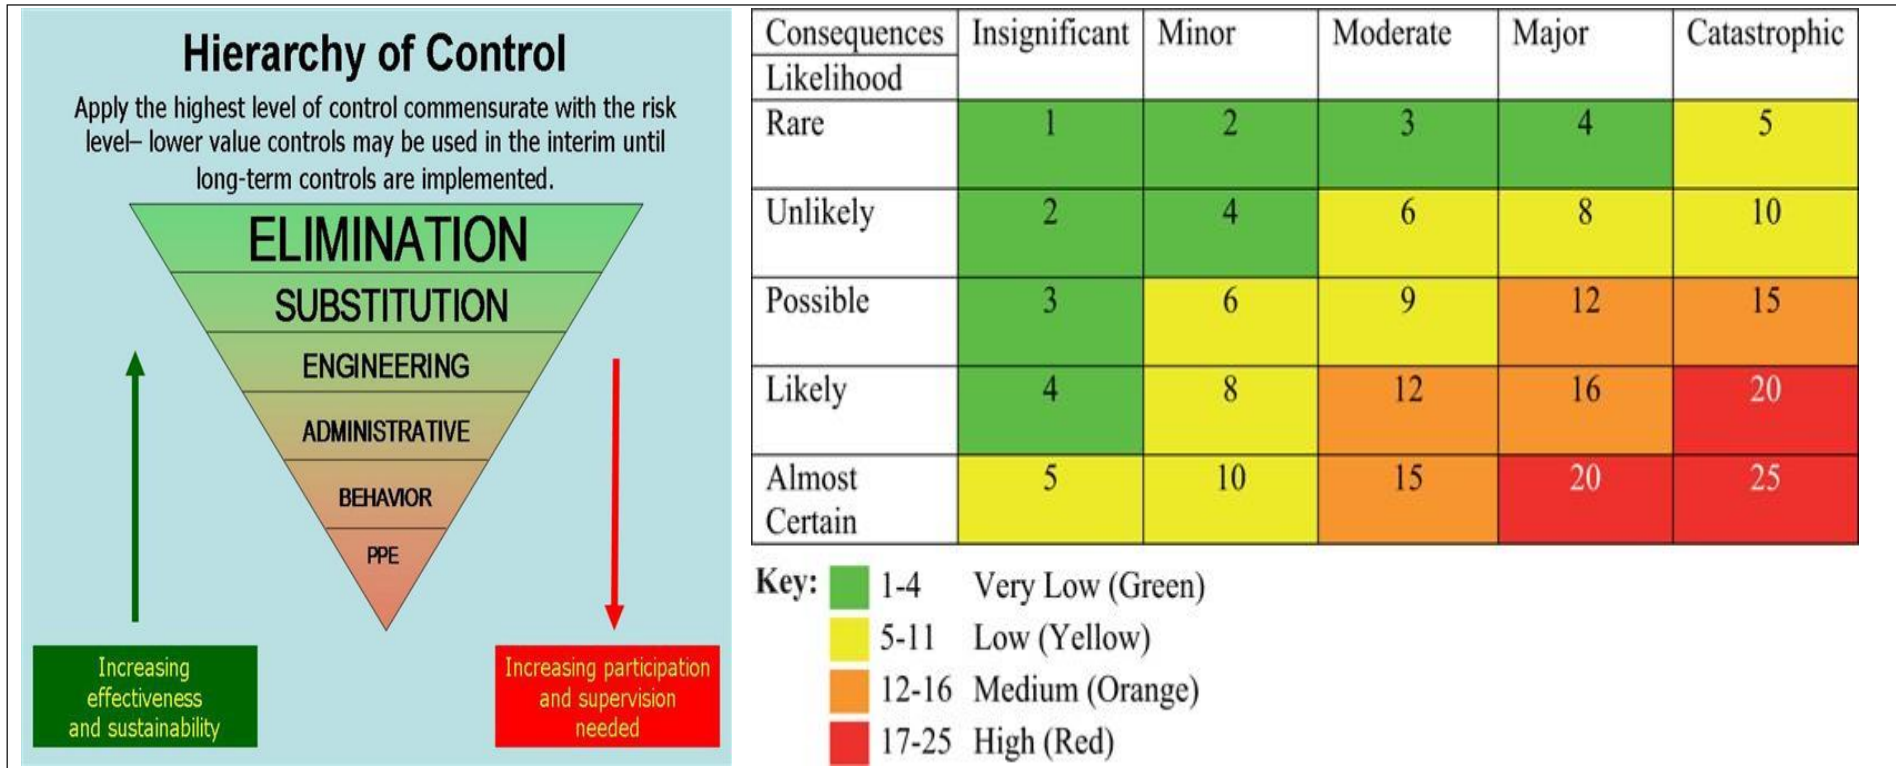

Equipment Training and Qualifications

Plant and Equipment Required for this Activity	Personal Protective Equipment	
Bobcat and attachments including but not limited to 4 in 1 bucket, Breaker, Auger, Ripper, etc.	High Visibility Clothing AS/NZS 1906.4:2012	Gloves appropriate for task AS/NZS 2161.1:2000
	Safety Footwear (steel capped) AS/NZ 2210.3:2009	Appropriate clothing as per site requirements
Specific Training Required for this Activity	Safety Glasses as required AS/NZ 1336:1997	Head Protection as required AS/NZ 1800:1998
Site Specific Induction Certificate of Competency to Operate Bobcat Construction Industry OHS Induction (White Card)	Wide Brimmed Hat as required AS/NZ 4399	Check for any site specific PPE requirements
	Sun Screen as required AS/NZ2604: 1998	Hearing Protection as required AS/NZ 1269.3:2005

Hazard/Aspect (Procedure Step)	Impact (What can go wrong)	Risk Score Without controls			Management Controls (Controls to be in place in order to manage potential hazards)	Risk Score With Controls			Person Responsible (To ensure controls are applied)
		Con	Prob	Risk		Con	Prob	Risk	
Pre-start	Uncontrolled plant movement during prestart acceptance and daily checks striking personnel	4	3	12	Isolate plant before commencing pre-start Identify delineation between site personnel and plant. Ensure that all relevant documentation is obtained through pre-start acceptance.	4	2	8	Plant Operator Site Personnel.
	Fuel, oil or chemical spill.	5	4	20	Operator to undertake pre-start daily check. Isolation procedures to be implemented. Safety observer required during inspection if machine operation is required. All hoists and lifting gear will be inspected. All hydraulic, lubrication, and fuel hoses will be in good order, free from abrasion and unions tight and free from leaks.	4	2	8	Plant Operator Site Foreman
	Importation/extraction of weeds and/or pests onto worksite.	2	4	8	Ensure vehicles, machines and attachments are free of weeds prior to removal from site. Remove any declared weeds from site if they are found to be growing at any time. Ensure general waste bin lids are closed at all times.	2	1	2	Plant Operator Site Foreman Site staff
	Slips, trips and falls	4	3	12	Housekeeping, visual inspection. Ensure that machine cabin is clean and free of construction tools and equipment. Always maintain 3 points of contact when entering or exiting the bobcat	2	1	2	Plant Operator

	Uncontrolled plant movements during construction and deliveries striking personnel	4	3	12	Ensure UHF channel is discussed during morning pre-start. Ensure all personnel are aware of designated work areas and no go zones as defined by traffic guidance schemes. Ensure all personnel involved in the task understand the machines lifting capacity.	4	2	8	Site Foreman Plant Operator
Hazard/Aspect (Procedure Step)	Impact (What can go wrong)	Risk Score Without controls			Management Controls (Controls to be in place in order to manage potential hazards)	Risk Score With Controls			Person Responsible (To ensure controls are applied)
		Con	Prob	Risk		Con	Prob	Risk	
Unloading bobcat from float	Uncontrolled plant movement Plant striking personnel	5	3	15	Float to park on level firm surface, spotter to guide bobcat off float. No personnel to be standing on float whilst plant is being moved. Spotter to be standing outside the overall extended height of the plant and have eye contact with the operator at all times. Hand signals to be identified prior to activity commencing. Ensure that area is identified by site supervisor as a no go zone area and will not be encroached upon.	3	2	6	Plant Operator Spotter Float Operator
Entering and exiting bobcat during the course of construction etc.	Slips, trips and falls Uncontrolled plant movement	4	3	12	Always maintain at least 3 points of contact when entering or exiting bobcat. If the bobcat is fitted with a laser computer system ensure it is turned off before exiting the machine.	4	2	8	Plant Operator

Movement of plant	Plant collision Plant/personnel collision Reduced visibility from dust Inhalation and sickness from dust	5	4	20	Keep vehicle speeds below site permitted maximum. Use watercart to minimize dust (particularly trafficable areas). Where appropriate consider stopping works on days of high winds. Communicate with other crews onsite using designated onsite UHF channel or hand signals. Reversing beeper and flashing light on mobile plant. PPE high visibility clothing to be worn at all times. Operator to check all potential blind spots through use of mirrors and looking over both shoulders prior to traversing. Where practicable, no personnel/plant/machine to work within the radius of the overall reach or lifted body height of the plant. Where practicable, plant to be segregated from other plant.	4	2	8	Plant Operator
Hazard/Aspect (Procedure Step)	Impact (What can go wrong)	Risk Score Without controls			Management Controls (Controls to be in place in order to manage potential hazards)	Risk Score With Controls			Person Responsible (To ensure controls are applied)
		Con	Prob	Risk		Con	Prob	Risk	
Movement of plant	Increased noise or vibration arising from worksite	2	5	10	Ensure exhaust and mufflers are checked regularly for cracks and breaks. Minimise the use of engine brakes particularly in built up areas. Only work within designated work times (as per council or EPA requirements). Keep maintenance schedule on plant up to date.	4	2	8	Plant Operator

Working with and near trenches and excavations	Trench collapse, plant rollover, workers struck by plant	5	4	20	<p>Hard hats to be worn at all times whenever in or near trench or excavation.</p> <p>No plant truck or machine should encroach within _____ distance of trench/excavation. When encroaching within this distance, spotters used to ensure the safety of personnel and integrity of trench while mobile vibrating plant is working within _____ distance of the trench/excavation. No personnel in trench while manual use vibrating plant is working within _____ distance of the trench/excavation. Deposit spoil uphill, if required place toe boards in front of spoil so pile is secure at all times.</p>	3	2	6	Site Foreman Engineers Plant Operator Site staff
	Workers hit by debris	5	4	20	<p>Hard hats to be worn at all times whenever in or near trench or excavation.</p> <p>Only plant necessary for task to work near excavations and trenches.</p> <p>Other plant/machines to stay a safe distance from excavation and trenches with help from site supervisor. No personnel in trench while vibrating plant are working in the vicinity.</p> <p>Consult ground staff prior to works being undertaken.</p>	4	2	8	Site Foreman Engineers Plant Operator Site staff
Hazard/Aspect (Procedure Step)	Impact (What can go wrong)	Risk Score Without controls			Management Controls (Controls to be in place in order to manage potential hazards)	Risk Score With Controls			Person Responsible (To ensure controls are applied)
		Con	Prob e	Risk		Con	Prob	Risk	

Working near Underground services	Workers struck by plant, Service strike, electrocution, underground services not identified on plans.	5	4	20	All services should be located and marked prior to commencement of excavation via dial before you dig or service locators. Where it is impossible to locate and mark all services a fulltime competent spotter should be with plant at all times. Any suspected services should be uncovered by hand digging and clearly marked so as to be visible to plant operators on site.	3	3	9	Plant Operator Spotter Site Foreman
Working near overhead powerlines	Workers struck by plant, Service strike, electrocution,	5	4	20	Refer to regulation 3.64(1) and (2) of the Occupational Safety and Health Regulations 1996 to determine danger zone. If any part of excavator is to come within the danger zone of powerlines a spotter must be present at all times. If these guidelines cannot be followed then work shall not commence until permission has been granted from the electricity company.	3	3	9	Plant Operator Spotter Site Foreman
Works near traffic	Plant / Traffic / Pedestrian interaction	4	3	12	Use trained traffic controllers and or barricades and signage to keep traffic separated from works. Ensure that there is a traffic management plan in place and that any interaction with pedestrian traffic is eliminated.	3	2	6	Site Foreman Plant Operator
Working or traversing on sloping ground	Rollover, spoil rolling onto staff working in trench	4	4	16	No plant or equipment is to work or traverse on a slope over designated gradient as outlined in the manufacturers user manual. If traversing slope use low speed and ensure that loads are to the uphill side of the plant.	2	2	4	Plant Operator Foreman
Hazard/Aspect (Procedure Step)	Impact (What can go wrong)	Risk Score Without controls			Management Controls (Controls to be in place in order to manage potential hazards)	Risk Score With Controls			Person Responsible (To ensure controls are applied)
		Con	Prob	Risk		Con	Prob	Risk	

Loading trucks with bobcat	Material falling from bucket, bucket hitting truck, people being struck by falling object	4	4	16	Ensure that all personnel are outside the working radius of the bobcat. Truck driver to remain in cabin at all times unless there is a specific area designed as a plant no go zone area. No operating of the bobcat whilst the trucks reversing. Do not overload the bucket.	2	2	4	Plant Operator Truck drivers Site foreman
Bobcat to move loads eg. Concrete, rock, timber etc.	Uncontrolled load movement, load moves out of bucket.	4	3	12	Keep load as low as possible. Ensure bucket is not overloaded and that load is within safe working load limit of the bobcat. Ensure flashing light and reversing beepers are working.	2	2	4	Plant Operator
Bobcat Backfills	Plant - personnel interaction Plant – plant interaction	4	3	12	Communication between spotter and all plant operators involved in this work task. Undertake risk assessment prior to backfilling. See control measures for working near trenches.	2	3	6	Plant Operator Spotter
Using attachments on bobcat	Attachments not made secure, operator accidentally releases attachment, oil spill while attaching hydraulic hoses.	5	4	20	Attachments checked to be secure after they've been attached. When connecting/disconnecting hydraulic lines must ensure hydraulic valves are in closed position.	4	2	8	Plant Operator Site Foreman Workers
Working bobcat with Rock Breaker or Grab Attachment	Flying rock or concrete chips could strike surrounding workers or machinery. Noise	4	4	16	All persons and plant to remain clear of work zone where practical. If personnel are required in the work zone ear and eye protection must be worn and full face shield.	3	2	6	Plant operator Site foreman
Hazard/Aspect (Procedure Step)	Impact (What can go wrong)	Risk Score Without controls			Management Controls (Controls to be in place in order to manage potential hazards)	Risk Score With Controls			Person Responsible (To ensure controls are applied)
		Con	Prob	Risk		Con	Prob	Risk	

Parking and maintaining bobcat	Nips, pinch, crush Personal injury	4	3	12	Operators to place bucket/attachment on the ground, apply park brake and isolation procedures to be implemented. Safety observer required if plant is to be operated during maintenance/inspection.	2	2	4	Plant Operator Site staff Site foreman
Hazardous substances used in bobcat operation and maintenance (Refueling)	Inhalation, ingestion, spills, explosion	5	3	15	Operator of plant to ensure engine is off before refueling. Ensure correct footing, don't walk on uneven and slippery surfaces. ENSURE DELIVERY FUEL NOZZLE IS IN DIRECT CONTACT WITH FUEL TANK INLET SO AS TO AVOID BUILD UP OF STATIC ELECTRICITY. Under no circumstances use a mouth operated siphon hose for decanting liquid hazardous substances. Use spill kit to capture spillage and ensure that the contaminated waste material is disposed of as a prescribed waste. Ensure correct PPE in use whilst refueling. Ensure spill kits are available and located close to designated refueling area. Clean up and report spills as soon as they happen.	3	2	6	Plant Operator Site Foreman Fuel delivery driver
Hazard/Aspect (Procedure Step)	Impact (What can go wrong)	Risk Score Without controls			Management Controls (Controls to be in place in order to manage potential hazards)	Risk Score With controls			Person Responsible (To ensure controls are applied)
		Con	Prob	Con		Con	Prob	Con	

Working in or near waterways	Impact on waterway from works leading to an impact on water quality	4	5	20	If required a permit to work in or near the waterway is to be sought from the local waterway authority prior to any works commencing in or near a waterway. No plant is to track through any waterway. No plant is to travel through any waterway. If crossing is required then approval shall be sought from the local waterway authority before any work can take place. Ensure that erosion and sediment controls are in place prior to disturbance of the waterway	3	3	9	Project Manager Site Foreman Site staff Plant operator
Use bobcat in an environmentally sensitive work area	The following could negatively impact environmentally sensitive areas eg. Wetlands. Spillage of hazardous substances eg. fuel, oil Creation of excessive dust. Damage or removal of vegetation. Incorrect placement of stockpiles	3	4	12	Ensure that any relevant local/state and/or federal approvals/ permits have been obtained before commencing work in that area. Ensure that any flagging off of particular areas within the environmental sensitive area is in place as stated by any relevant approvals and/or permits. Ensure any stockpiles are placed away from any known sensitive areas or no-go zones. Ensure water is used (via hose and or watercart) to suppress dust, ensuring any run off is diverted away from sensitive areas. Ensure that a spill kit/s is located nearby to the environmental sensitive area for a quick response to any spills of oils or fuels. Ensure that the contaminated material is bagged and disposed of as a prescribed waste. Report any spills to site foreman/project manager.	2	2	4	Plant Operator Foreman workers
Hazard/Aspect (Procedure Step)	Impact (What can go wrong)	Risk Score Without controls			Management Controls (Controls to be in place in order to manage potential hazards)	Risk Score With controls			Person Responsible (To ensure controls are applied)
		Con	Prob	Con		Con	Prob	Con	

Loading bobcat onto float	Uncontrolled plant movement	4	3	12	<p>Float to park on level, firm surface, spotter to guide backhoe on to float. No personnel to be standing on float whilst plant is being moved. Spotter to be standing outside the overall extended height of the plant and have eye contact with the operator at all times. Hand signals to be identified prior to activity commencing. Ensure that area is identified by site supervisor to ensure that the no go zone areas are not encroached.</p> <p>Ensure that a suitable loading and unloading area is identified by the site foreman.</p>	2	1	2	Plant Operator Spotter Float driver

Additional Site Specific Hazards and Controls

Hazard/Aspect (Procedure Step)	Impact (What can go wrong)	Risk Score Without controls			Management Controls (Controls to be in place in order to manage potential hazards)	Risk Score With controls			Person Responsible (To ensure controls are applied)
		Cons	Prob e	Risk		Cons	Prob e	Risk	
COVID – 19 Pandemic	Acquire COVID-19	5	3	12	<p>Operators to adhere to good hygiene practices.</p> <ul style="list-style-type: none"> Wash hands regularly Clean hands before handling paperwork Cover your coughs Seek medical assistance if you display symptoms Keep work areas clean -steering wheel/controls, dashboard, door handles, fuel filling, any other touchpoints Practice social distancing Clean and disinfect frequently used items, phones, wallet, pens, keys Where PPE as directed Plan your route, minimize stops and physical interaction Avoid shared workspaces such as lunchrooms, site sheds, anywhere where there is less than 4 square m per person. Wear a face mask 	2	1	2	Operators
	Infect others with COVID-19	5	3	12	<p>Seek medical assistance if you display symptoms.</p> <ul style="list-style-type: none"> If you are unwell do not go to work. Isolate and seek testing. If you have been in contact with someone who has COVID-19. Isolate and seek testing. Inform your employer and notify any worksites you have attended. 	2	1	2	Operators

	Travel Permits COVID Safe Plan	5	3	12	<ul style="list-style-type: none"> • Ensure you carry a valid Travel Permit at all times • Record sites visited, date time, duration. (Hire docket are adequate) <p>Follow site COVID Safe Plan. Ask for a copy of the Plan before attending site.</p>	2	1	2	Operators Operators
--	---	---	---	----	--	---	---	---	--

SWMS Acceptance

We the undersigned confirm that we have read and clearly understand this safe work method statement. We confirm we have the required training and qualifications to carry out the required tasks in accordance with the control measures outlined in this safe work method statement. We also understand that if the controls as outlined cannot be applied then work must cease immediately.

Date	Name	Company	Position	Signature

Review and Monitoring

Review No.	1	2	3	4	5	6
Name						
Date						